

第2まさむね号

全旋回式起重機船 押航式
(250TON吊級)





ハヤカワ建設株式会社

〒061-0215 北海道石狩郡当別町対雁30番地

TEL(0133)23-3734 FAX(0133)22-2185

第2まさむね号 SKK - 2500DT - N型

【一般配置図】

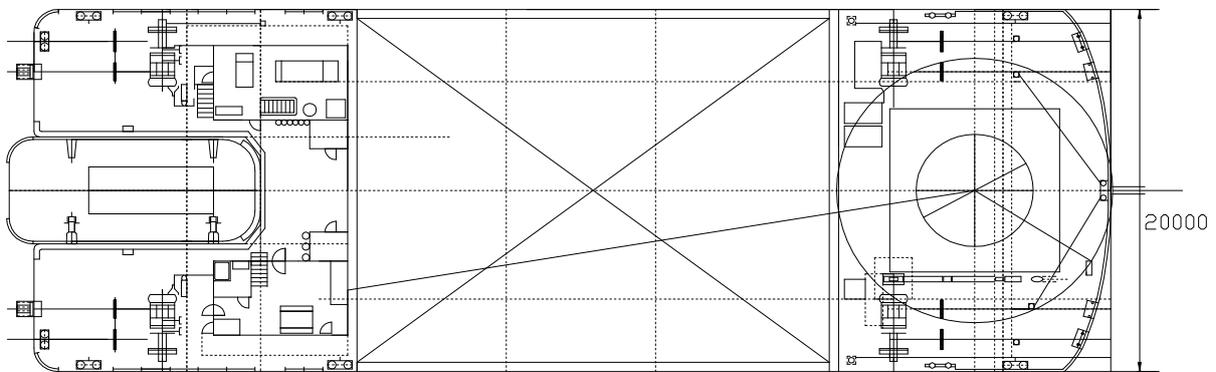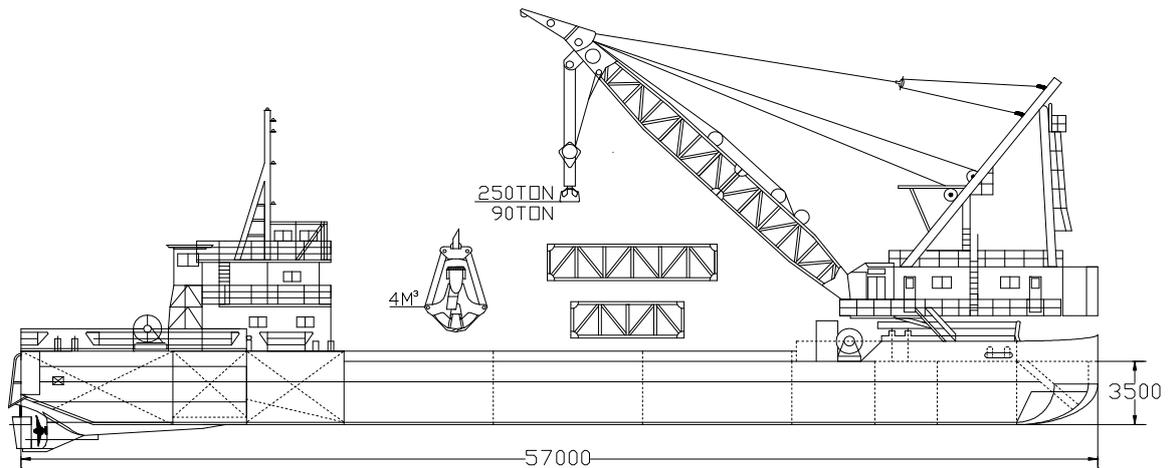


CARGO SPACE
25,000 × 19,000

【定格総荷重表】

PRINCIPAL DIMENSIONS

PUSHER BARGE
LENGTH 57^M00
BREADTH 20^M00
DEPTH 3^M00

PUSHER BOAT
LENGTH 11^M85
BREADTH 5^M60
DEPTH 2^M10
SPEED 12^{KT}00
GROSS TONNAGE 19^T00

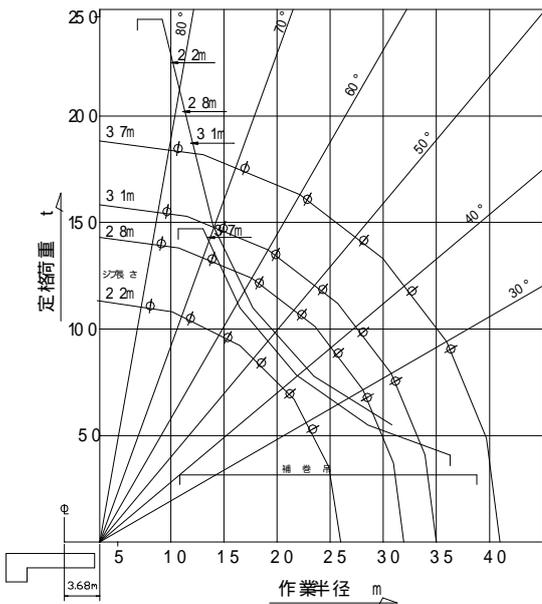

ジブ長さ	ジブ角度	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	76.7°	80°
22m	主 定格荷重 ton	93.1	98.3	104.8	113.1	123.6	136.8	154.1	176.9	208.1	253.0	256.0	
	巻 作業半径 m	23.1	22.1	21.0	19.8	18.4	16.9	15.3	13.7	11.9	10.1	10.0	8.2
28m	主 定格荷重 ton	71.6	76.0	81.6	88.7	97.6	109.1	123.1	144.2	172.3	213.6	216.0	
	巻 作業半径 m	28.3	27.0	25.6	24.0	22.3	20.4	18.3	16.2	14.0	11.7	11.5	9.3
31m	主 定格荷重 ton	63.7	67.8	73.0	79.5	87.9	98.6	112.7	131.7	140.0			
	巻 作業半径 m	30.9	29.5	27.9	26.1	24.2	22.1	19.8	17.5	16.6	15.0	12.4	9.8
37m	主 定格荷重 ton	46.3	49.9	54.4	60.2	67.5	77.0	89.5	106.5	130.6	167.0	169.0	
	巻 作業半径 m	36.1	34.4	32.5	30.4	28.0	25.5	22.8	20.0	17.0	14.0	18.9	10.8

第八まさむね丸 押船 19t



ひので丸 作業船 5t未満

